

FOREST

DRAPERY HARDWARE




GS[®]
Contract System

Product information



- Heavy duty hand drawn system for medium and heavy draperies.
- Bendable; it can be curved and reversed curved using a 20 cm (8") radius or continuous curved.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected. Can also be used with ball bearing carriers.
- Ideal for use with overlap masters and batons which can be mounted behind or in front of draperies.
- Can also be used for ripplefold and accordiafold drapery systems.
- Maximum fabric weight: 15 kg. per mtr (11,25 LBS per ft).
- Colours available: white, silver and off-white.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Available lengths: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 5,8 m (19'), 6.10 m (20')
- Limited lifetime warranty.

Applications

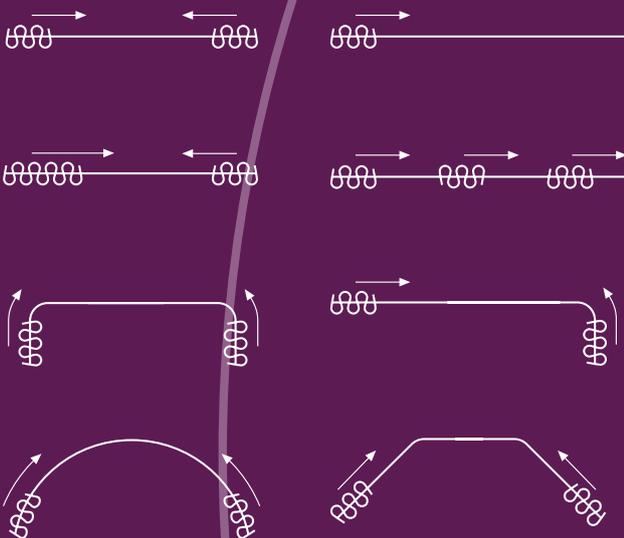


Features

- Stiffner is sewn onto drapery overlap
- Stiffner socket is placed into master arm
- Baton is attached by a screw through the eyelet and into the master arm.

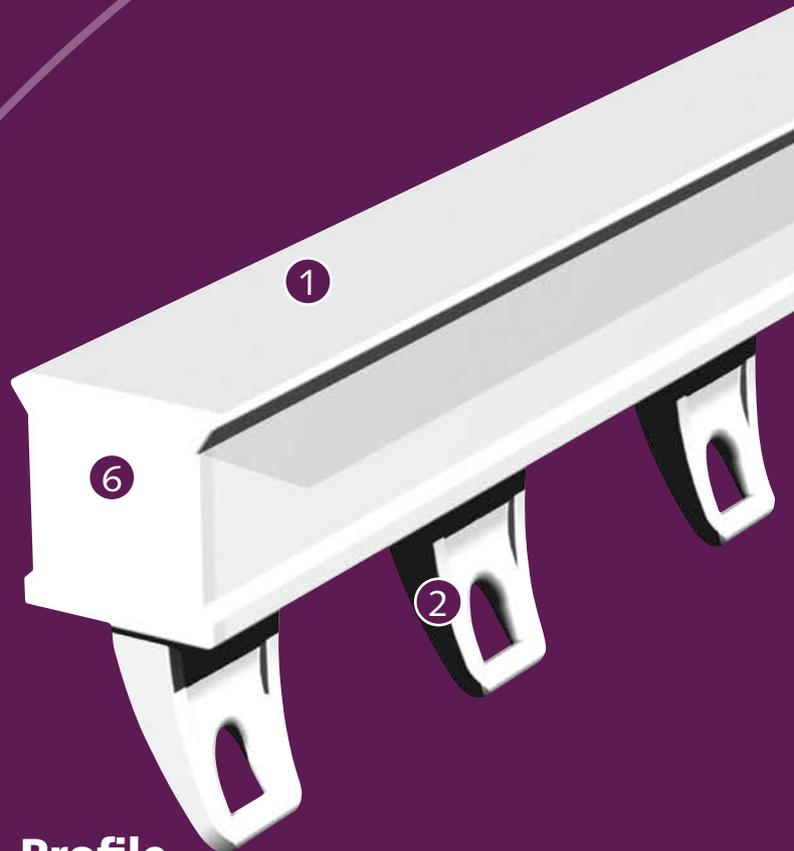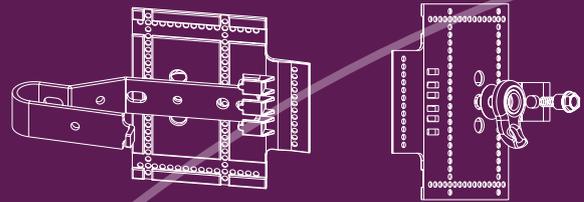

Profile

- Shown actual size 1:1. Weight: 235 gram p. mtr (2.53 ounce - ft).
- Aluminium Extrusion
- Dimensions: 20 mm x 20 mm (0,8" x 0,8")



For use in

Hotels - Motels - offices - schools - healthcare residential or at any location where a heavy duty hand drawn system is required.



- ① CS Track
- ② Carrier
- ③ Master carrier overlap
- ④ Master carrier underlap
- ⑤ Ball Bearing carrier
- ⑥ Endcap



Bending/curving

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving is also available by special order from factory only.



Mounting Brackets

SK Ceiling bracket



clickable carrier




Easy installation
click - position - tighten

Mounting Brackets

SK Wall bracket aluminium single

A) 7,5 cm (3"): B) 6,3 cm (2,5")


A) 10 cm (4"): B) 8,8 cm (3,5")

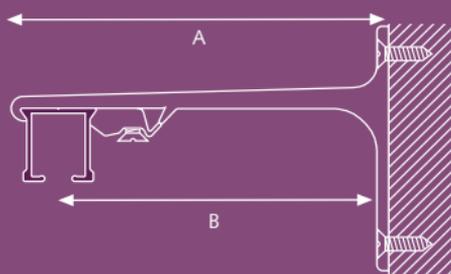

SK Wall bracket aluminium double


A) 15 cm (6"): B) 9,2 cm (3,6"), C) 4,5 cm (1,8")

A) 20 cm (8"): B) 9,2 cm (3,6"), C) 9,5 cm (3,7")

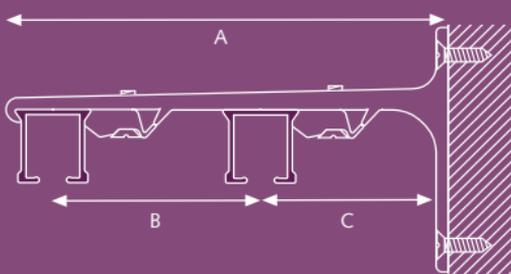

SK Wall bracket aluminium triple

25 cm (10")

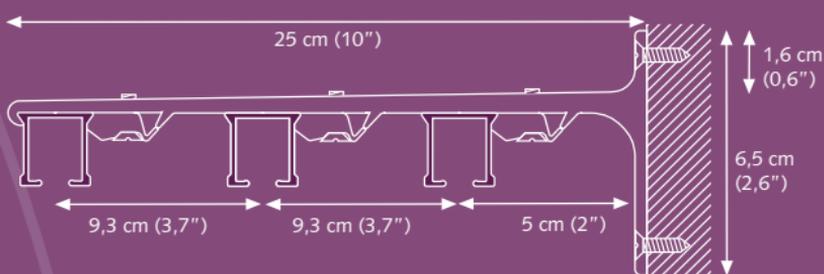

Other brackets are available. Brackets need to be placed every 60 cm (24").


Colours available from stock:

Complete the art.nr. with the indicated colour-code

01 White

03 Silver

Other colours can be delivered on request.



CS Track

Extruded aluminium chromated, powder coating, factory lubricated. Available lengths 3.66 m. (12'), 4.27 m. (14'), 4.88 m. (16'), 5.8 m. (19'), 6.10 m. (20').

25010.. ...cm
10/bundle



Carrier

Contract klick carrier patented, clickable.

25101...000
250/box



CS Stop Carrier

clickable.

25102...000
100/box



CS Stop Carrier with Hook

clickable.

25105...000
100/box



Economy Slide

Can turn in the track. White.

2510601000
500/box



Ball Bearing Carrier Slim Line

30 % less stack back. Clear.


2512000000
100/box



Master Carrier R/L

Underlap right or left. Suitable for heavy drapes.


2514600000
25/box



Master Carrier R/L

Overlap right or left. Suitable for heavy drapes.

2514700000
25/box



Stiffner large


with grommet Adjustable for wall or ceiling mount.

5116001000
15/box



Endcap with Screw
Including economy slide.

251640000
100/box



CS Replacement Bending Strips
For CS track, length 90 cm.

256010000
1/set

Electric powered bender.
Length 7 meter (23').

106030000
1/set



Baton Fiberglass

With harness snap in White. 92 cm (36"), 122 cm (48"), 152 cm (60").

1065101 ...
100/box



Bending Stand

Stand for CS/CCS bending tool


256080000
1/each



Smart Klick Ceiling Bracket

"Klicks" onto track, powder coated. Install with VK screw 4 mm.


10182..000
100/box



Adjustable Wall Bracket

Smart klick, adjustable single from 7,5 cm (3") to 11,5 cm (4.5")

10208..115
100/box



Double from 6,5 cm (2,5") to 10 cm (4") - 15 cm (6") to 19,5 cm (7,5")

10208..195
50/box



Electric Powered Bender

Available in 230V or 115V, to create continuous curves and arches. Minimum radius 50 cm (20").


106050000
1/box



Bending Wheels

For electric powered bender. Complete set of 3 wheels. For CS/CCS track only.

256070000
1/set



Aluminium Wall Bracket

Smart klick, powder coated.

10203.. ... mm

7,5 cm single (3")

20/box

10 cm single (4")

20/box

15 cm double (6")


15/box

20 cm double (8")

15/box

25 cm triple (10")

10/box



Electric Powered Railcutter

230 Volt EU
115 Volt USA
230 Volt UK

106110000
106120001
106120002
1/each

Replacement Blade

For electric powered railcutter.

106120000
1/each

Distributor:



Contract Bending Tool

For CS/CCS/FMS/CRS/MTS

256000000
1/each

CS/CCS/FMS Bending Wheel All-in

256100000
1/each

FOREST
DRAPERY HARDWARE